

overview

- PROFINET and EtherNet/IP interface integrated
- FEX image processor
- FEXLoc 360° part location
- Flexible result conjunction
- VeriFlash flash controller integrated
- VeriSens XC Tube included in delivery
- Download VeriSens Application Suite: www.baumer.com/vs-sw



technical data

general data

resolution	640 × 480 px
sensor type	1/4" CCD, monochrome
illumination	external, available as accessory
illumination connection	direct (integrated VeriFlash® flash controller)
high-resolution mode	max. 118 inspections per second
high-speed mode (limited resolution)	max. 144 inspections per second
number of jobs (products)	≤ 255
features per job	32
signal processing	Baumer FEX® 4.0
defect image memory	32
lens	C-mount

electrical data

nominal voltage power supply	24 V +- 25%
nominal voltage power supply (add-on)	Class 2 according to NEC / protection class III
nominal voltage power supply (info)	The device is intended for supply from an isolated limited power source according to UL61010-1, 3rd ed cl. 9.4 or a limited energy source according to UL60950-1 or Class 2 according to NEC.
power consumption	max. 42 W (with I/O and lighting)
inputs	8 ... 30 V (polarity protected)

electrical data

digital inputs	5 inputs trigger job selection external teach-in encoders (CH-A, CH-B) 500 kHz
outputs	PNP $I_{peak} = 100 \text{ mA}$ and $I_{eff} = 50 \text{ mA}$ (short-circuit proof)
digital outputs	5 outputs Pass / Fail Flash Sync Alarm Camera Ready Output Enable
initial setup	Ethernet (10BASE-T / 100BASE-TX)
process interface	PROFINET (CC-A) EtherNet/IP™ TCP/UDP (Ethernet)
visualization	configurable web interface with MultiViewer function

mechanical data

width	53 mm (without lens/tube)
height	99,5 mm (without lens/tube)
depth	49,8 mm (without lens/tube)
weight	≤ 300 g (without lens/tube)
material	housing: aluminum cover glass XC tube: PMMA

environmental conditions

operating temperature	+5 ... +55 °C @ T = measurement point
-----------------------	---------------------------------------

technical data

environmental conditions

storage temperature	-20 ... +70 °C
humidity	0 ... 90 % (non-condensing)
protection class	IP 67 (with tube)
vibration load	IEC 60068-2-6 IEC 60068-2-64

mechanical shock resistance

EN 60068-2-27

code types

barcode	2/5 Industrial 2/5 Interleaved Codabar Code 39 Code 93 Code 128 PharmaCode EAN 8 EAN 13 UPC-A UPC-E GS1 DataBar GS1 128
matrix code	DataMatrix (ECC 200) GS1-DataMatrix QR-Code PDF417
font	many font styles (recommended: sans serif, proportional) Dot Matrix characters: A-Z a-z 0-9 + - . : / ()

feature checks

part location	part location on contours part location on edges part location on circle part location on text line
---------------	--

feature checks

geometry	distance circle angle count edges point position edge characteristics
----------	--

feature comparison	count contour points contour comparison brightness contrast area size count areas pattern comparison find object positions
--------------------	---

identification	barcode matrix code text
----------------	--------------------------------

integrated flash controller

voltage	12 V DC or 24 V DC (permanent) 24 V DC or 48 V DC (pulsed)
current	$I_{\max} = 800 \text{ mA}$ at 24 V DC (permanent) ($\pm 10 \%$, at least $\pm 100 \text{ mA}$, at 25 °C) $I_{\max} = 4 \text{ A}$ at 48 V DC (pulsed) (+10/-20 % , at least $\pm 100 \text{ mA}$, at 25 °C)
flash time	max. 1 ms (Duty Cycle max. 1:10)

conformity

conformity	CE RoHS KC (R-R-BkR-VeriSens-XC-IP) EAC UL recognized
------------	---

non-volatile memory

flash memory size	2000 Mbit Flash S34ML02G100BHI0000
-------------------	------------------------------------

Electrical connection



1: PWR (+18-30 V DC)	7: OUT3
2: Ground	8: IN3
3: IN1 (Trigger)	9: OUT4
4: OUT1	10: IN4
5: IN2	11: IN5
6: OUT2	12: OUT5



1: TD+	3: TD-
2: RD+	4: RD-

Electrical connection



1: +24 V or +48 V Flash	3: Ground
2: +12 V or +24 V Flash	4: Flash Sync


voltage outputs configurable by software

VS XC800M03X00IP


XC800

Article number: 11166806

dimension drawing

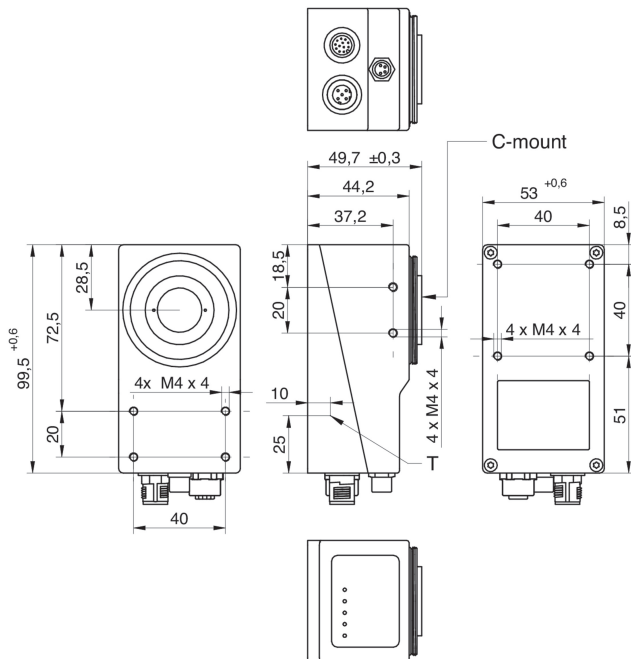

C-mount support



XC Tube, XC Tube Module

